



Strata Single Fixed Head - W9211

Assembly Instructions

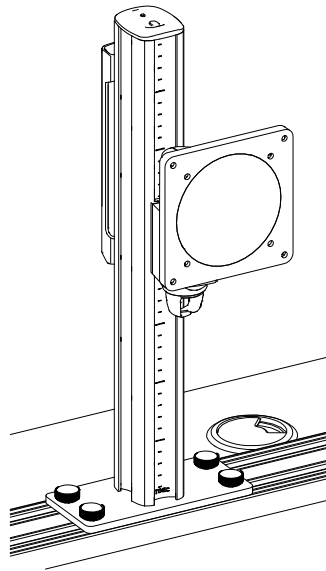

COMPONENT CHECKLIST

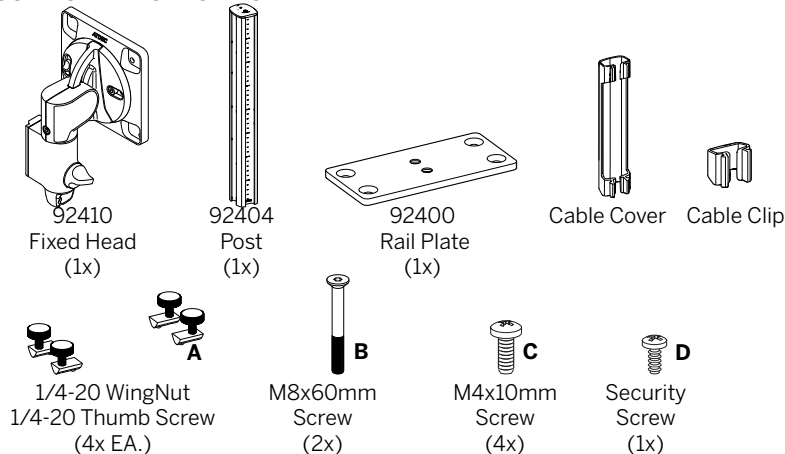

W9211 CONTAINS

- 1x 92404
- 1x 92410
- 1x 92400

REQUIRED TOOLS

- Phillips Head Screwdriver
- 4mm Hex Key

IMPORTANT INFORMATION

- Please ensure this product is installed as per these installation instructions.
- Do not remove/ throw away the black plastic sleeve on the channel clamp or arm links.
- The manufacturer accepts no responsibility for incorrect installation.
- This product is not suitable for outdoor use or mobile applications.
- Do not over-tighten screws and adjustment points on product.
- VESA mounted accessories (such as mini PC brackets and mounts), offset VESA locations, and unevenly weighted monitors (relative to the center of the VESA mounting interface) exert additional leverage that can exceed the capacity of the mount even though the monitor weight may be within the stated range. Please contact Atdec if you would like further information.


WEIGHT RANGE*

Flat display	0-12kg (26.5lbs)
Curved display	0-10kg (0-22lbs)


Strata Single Fixed Head-W9211

Assembly Instructions


STEP 1 - ATTACH POST TO RAIL PLATE

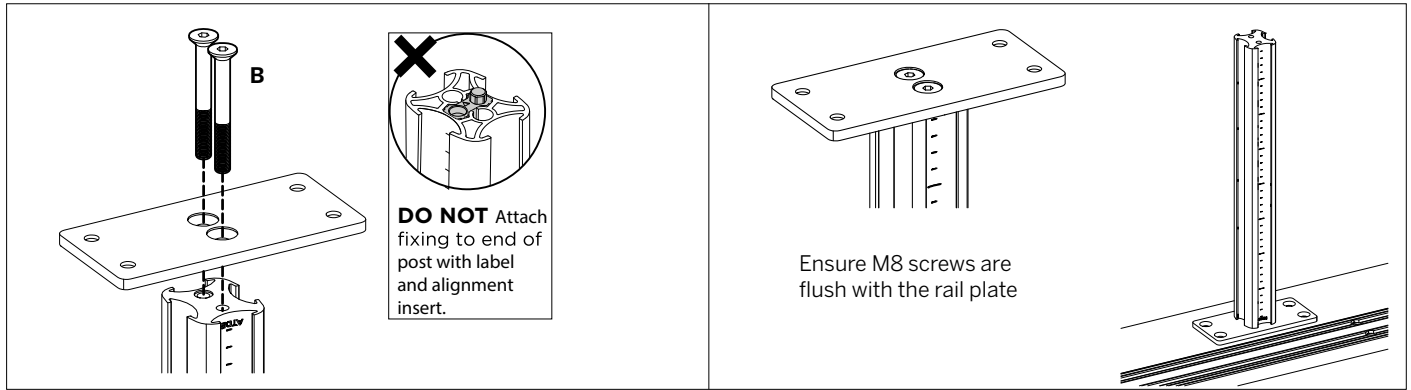

STEP 2 - ATTACH POST TO VERSA TRACK

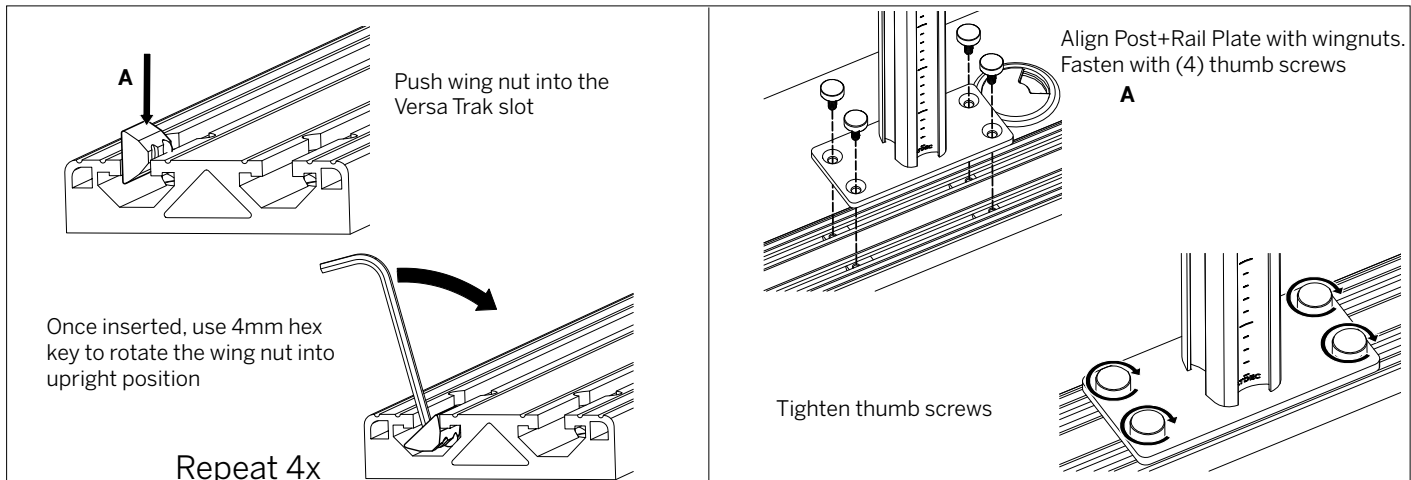

STEP 3 - FIX ARM TO POST

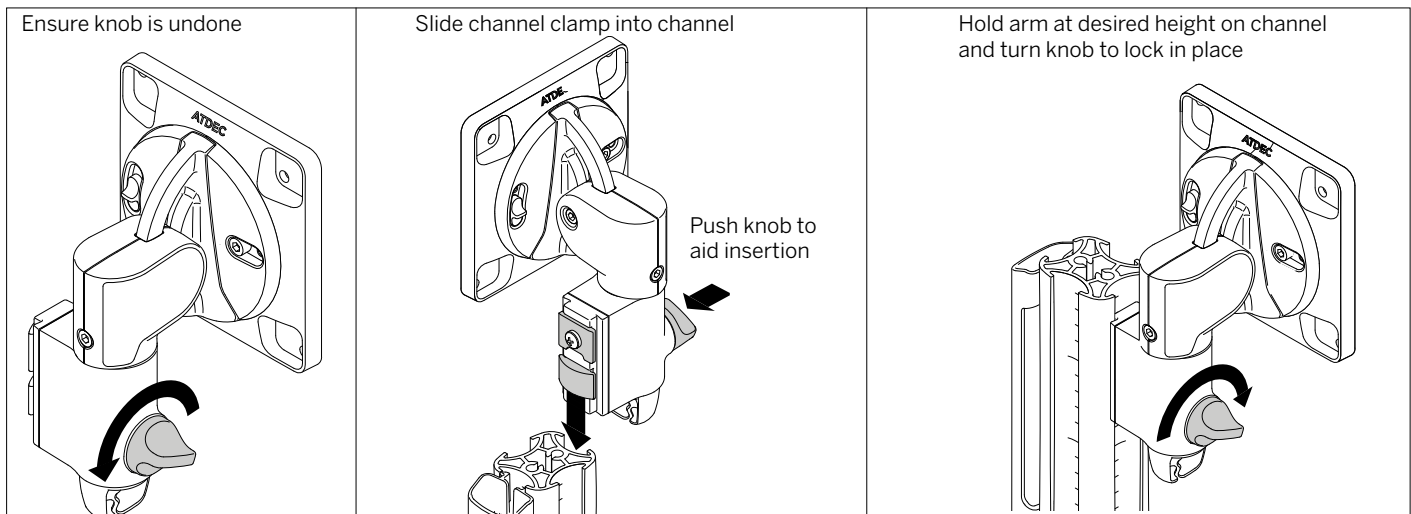


Strata Single Fixed Head-W9211

Assembly Instructions


STEP 4 - ATTACH VESA HEAD TO MONITOR

Slide release switch up and click into unlocked position, then lift VESA head away from the arm.

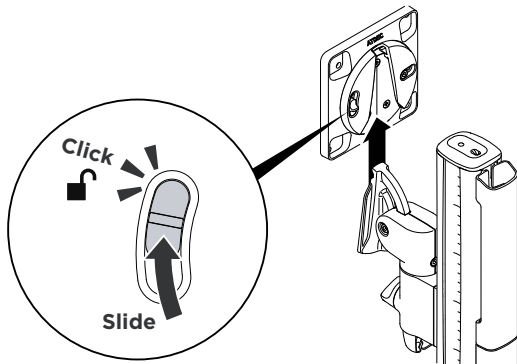


Check VESA mounting compatibility of monitor


Note: For other sizes, use a suitable adaptor plate (sold separately)




Note: Recessed 75x75 VESA interfaces will require a Spacer Kit (sold separately)






Attach VESA head onto monitor with provided screws. (Alternatively, use fasteners specified by the monitor manufacturer)

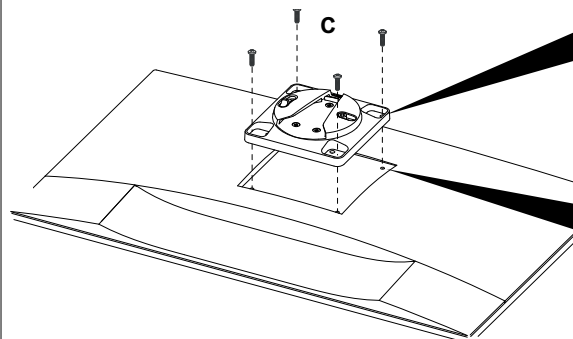

TIP
To allow monitor to be rotated upside down, mount VESA head in the alternate orientation shown.

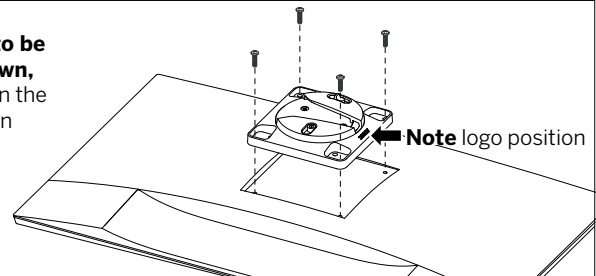


Note: Ensure screw length suits the monitor VESA mounting holes



STEP 5 - ATTACH MONITOR TO ARM


Fit monitor onto arm

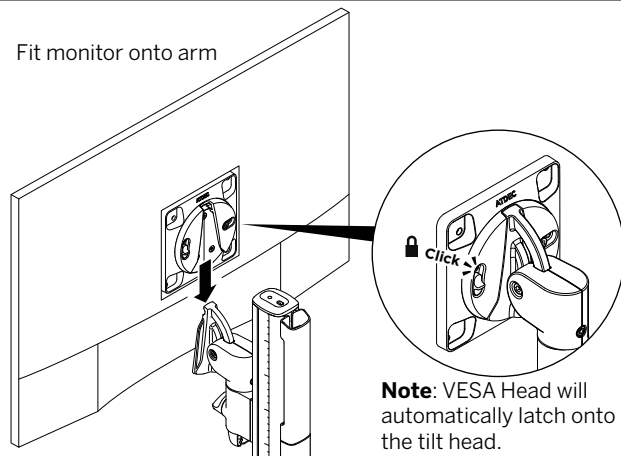

Note: VESA Head will automatically latch onto the tilt head.

OPTIONAL SECURITY SCREW

If desired, once monitor is attached to the arm, install the security screw. This disables the release switch, preventing theft.

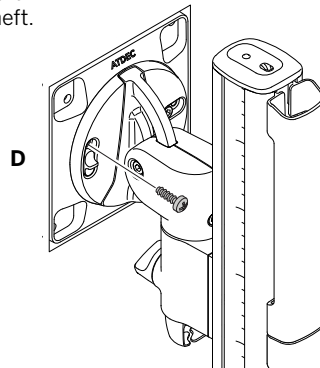


Strata Single Fixed Head-W9211


Assembly Instructions

STEP 6 - FINE ADJUSTMENTS

Factory set tilt tension will be suitable for most monitors.
If required, adjust the tilt tension using the 4mm hex key

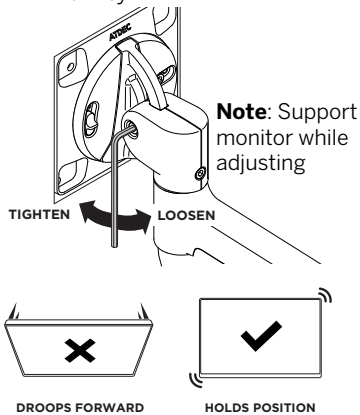


Tune the rotation tension using 4mm hex key.
Adjustment may only be required for ultrawide monitors.

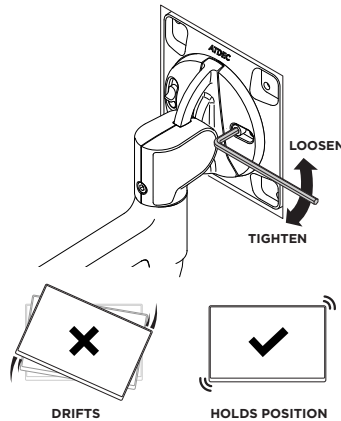

ARM JOINT TENSION

Arm movement can be adjusted to be firmer or more free. Use the 4mm hex key to adjust the tension of the pivot joints on the arm

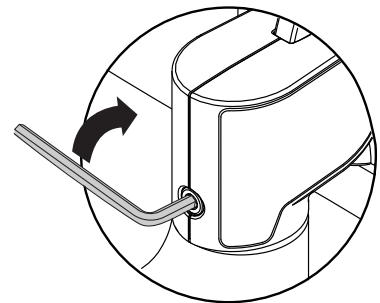

DO NOT OVERTIGHTEN

Increasing the tension only stiffens movement and cannot lock off arm movement.

STEP 7 - CABLE MANAGEMENT

